

HS-55C



HFOFSBMGFBUVSFT

- 5inch (led)color display
- Internal / External marine GPS antenna with 1o meter cable
- Power cable with fuse
- Dust cover
- Operating manual
- Bracket mount
- 2 nos screw knobs

CHARACTERISTIC

- LED Backlight Display
- High Speed CPU
- Providing the detail cartography
- Outdoor use


DISPLAY SPECIFICATION

Display screen	5 inch color LCD with LED back-light
Power supply	DC 12V-36V
Operating Temperature	Display Unit -15°C- + 50°C Antenna Unit -25°C- + 70°C
Performance Standard	IMO Resolution MSC112(73)
Display	Method Mercado projection
Display Mode	True motion/North up/Course-up/Head up
Latitude Limits	Between 85° N to 85° S
Map Scale	0.05nm -1,500nm
Map Datum	WGS-84
Waypoint	20,000 point
Track Point	50,000 point
Route	Max capacity 100 Routes *20 WPTs per each Route. Each with name tags (8 alphanumeric characters)
Chart Data	Built-in
Output Data	NMEA-0183
Input Data	NMEA-0183
Alarm	Interval timer AIS (CPA, TCPA)

GPS SPECIFICATION

Receiver Frequency	L1 1575.42 MHz (C/A)
Number of Channel	Over 50 channel
Accuracy	Position 2.5m CEP
Sensitivity	Acquisition -148 dBm Tracking -165
Data Update Rate	1 Second

INTERCONNECTIONS

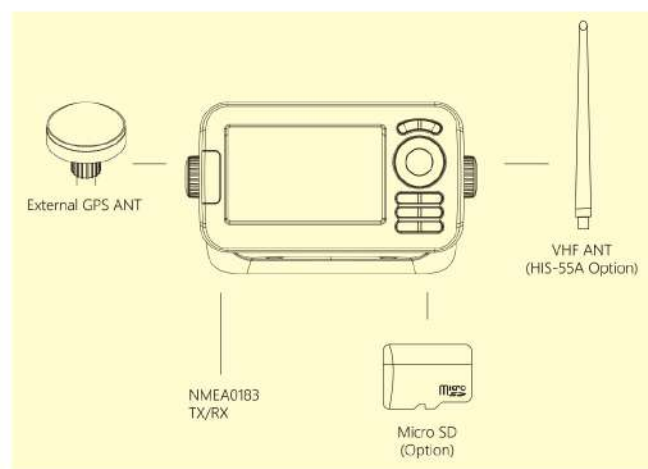

****The specs are obtained from Haiyang and the manufacturer reserves the right to modify the specs as needed.****

Sales Office:

Basement No.3, Badri Baug,
Sayed Mukri Street, Near Masjid
Railway Station, Masjid West,
Mumbai - 400003. India

Aerial Services Pvt. Ltd.

Phone: +91 9819332776 | 9820106100
Email: aspl@asplindia.in | aml@asplindia.in
Website: <https://www.asplindia.in>
© Imitation of graphic or part thereof it is a punishable offense

Registered Office:

Unit No.3, S. K. Industrial Park,
Darpan Compound, W.E.H. No.8,
Valiv, Vasai (E) - 401208.
India.